




SPECIFICATION SHEET


410ECON



Hand Apply



Front

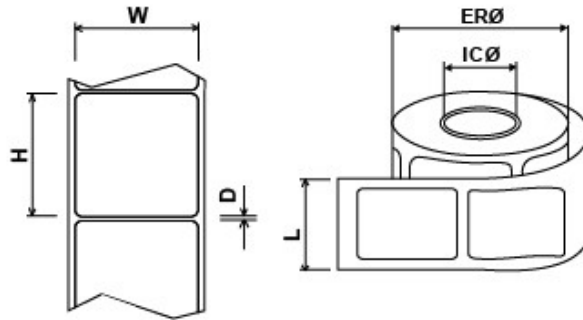

Product Description:	410 ECON WHT 1KR / 76
Part N°:	10111887
Label Dimensions (W*H):	40x40 mm / 1.57"x1.57"
Distance between labels (D):	2.47 mm / 0.10"
Liner Width (L):	41.7mm / 1.64"
External Roll Diameter (ER):	Ø152.28 mm / 6"
Inner Core Diameter (IC):	Ø76.2 mm / 3"
Face Sheet:	White Thermal Transfer Paper
Adhesive:	All Purpose Grade
Labels per roll:	1,000 Pcs
Labels per case:	20,000 Pcs(20 rolls)
Approx. Weight roll:	0.58kg / 1.28lbs.
Approx. Weight case:	12.56 kg / 27.67 lbs.
Frequency (MHz) ± 5%:	8.2 ±5% MHz
Electrostatic Discharge Tolerance (ESD):	1.2KV(Minimum)
*Minimal Order Quantity (MOQ)	20,000 Pcs (1 carton)

Storage conditions: Keep dry but do not expose to direct sunlight

- Recommended storage temperature: 18 to 29°C Maximum temperature should not exceed 43°C
- Maximum shelf life of RF labels when stored in recommended conditions in 2 years**

Cases should never be stacked more than 5 high.

* Unless otherwise specified in contractual conditions

** RF circuits have no expiry date; however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.

All rights reserved © Checkpoint Systems Inc. 2025. All information and illustrations are intellectual property of Checkpoint Systems, Inc.
Any copying, reprinting, manipulating or publishing in part or in whole is strictly prohibited
Last modified: 06/22/2025



RoHS ✓
REACH ✓

www.checkpointsystems.com

ST-03-02-04