




SPECIFICATION SHEET


410HA



Front



Back

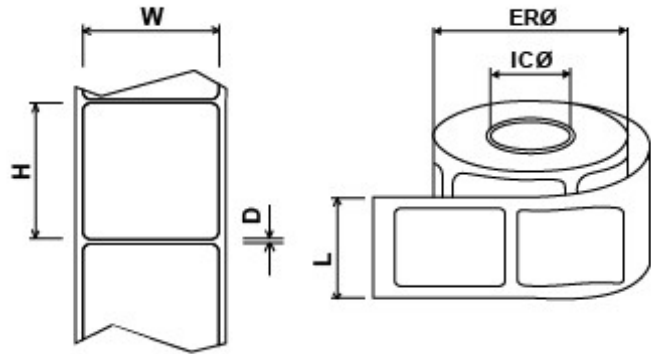

Product Description:	410 SP DBC 2K TRAY / 25
Part N°:	7150318
Label Dimensions (W*H):	40x40 mm / 1.57"x1.57"
Distance between labels (D):	2.47 mm / 0.10"
Liner Width (L):	41.7 mm / 1.64"
External Roll Diameter (ER):	Ø92.01 mm / 3.62"
Inner Core Diameter (IC):	Ø25.4 mm / 1"
Face Sheet:	White Thermal Transfer Paper
Adhesive:	All Purpose Grade
Labels per roll:	500 Pcs per roll, 4 rolls per tray
Labels per case:	20,000Pcs (10 Tray)
Approx. Weight roll:	0.29 kg / 0.64 lbs.
Approx. Weight case:	12.6 kg / 27.75 lbs.
Frequency (MHz) ± 5%:	8.2 ±5% MHz
Electrostatic Discharge Tolerance (ESD):	1.5KV (Minimum)
*Minimal Order Quantity (MOQ)	20,000Pcs (1 carton)

Storage conditions: Keep dry but do not expose to direct sunlight

- Recommended storage temperature: 18 to 29°C Maximum temperature should not exceed 43°C
- Maximum shelf life of RF labels when stored in recommended conditions in 2 years**

Cases should never be stacked more than 5 high.

* Unless otherwise specified in contractual conditions

** RF circuits have no expiry date; however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.

All rights reserved © Checkpoint Systems Inc. 2025. All information and illustrations are intellectual property of Checkpoint Systems, Inc.
Any copying, reprinting, manipulating or publishing in part or in whole is strictly prohibited
Last modified: 06/20/2025



RoHS ✓
REACH ✓

www.checkpointsystems.com