


Label Specification


410XP,8.2,2KR DE,Plain




Xform
Performance



Front



Back

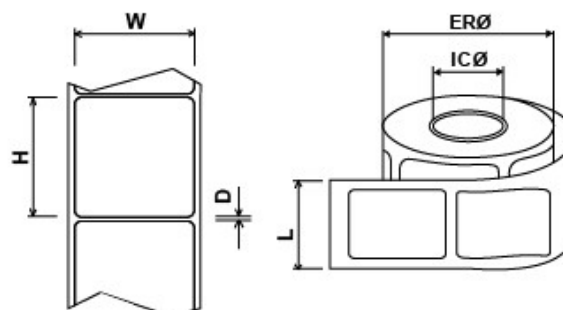

Product Description	410XP,8.2,2KR DE,Plain
Part No:	10152137
Label Dimensions (W*H):	40x41 mm / 1.57"x1.61"
Distance between labels (D):	2.39 mm / 0.09"
Liner Width (L):	42.00mm / 1.65"
External Roll Diameter (ER):	Ø194.18 mm / 7.64"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"
Face Sheet:	White Premium Grade Paper
Adhesive:	All Purpose Grade
Labels per roll:	2000 Pcs
Labels per case:	20,000 Pcs (10 rolls)
Approx. Weight roll:	1.15 kg / 2.53 lbs.
Approx. Weight case:	12.45kg / 27.47 lbs.
Frequency (MHz) ± 5%:	8.2 ±5% MHz
Electrostatic Discharge Tolerance (ESD):	3 kV(Minimum)
*Minimal Order Quantity (MOQ)	20,000 Pcs (1 carton)

Storage conditions: Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29°C Maximum temperature should not exceed 43°C • Maximum shelf life of RF labels when stored in recommended conditions in 2 years**

• Cases should never be stacked more than 5 high.

* Unless otherwise specified in contractual conditions

** RF circuits have no expiry date; however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.



RoHS ✓
REACH ✓

All rights reserved © Checkpoint Systems Inc. Thorofare, USA 2019
All information and illustrations are intellectual property of Checkpoint Systems, Inc.
Any copying, reprinting, manipulating or publishing in part or in whole is strictly prohibited.

Last Modified: 04/12/2022

checkpointsystems.com